

Model 101A-a19L

Non-Compensated Low Pressure OEM Sensors



101A-a19L non-compensated low pressure OEM sensors are manufactured from BCM piezoresistive silicon dies. The sensors are designed with CAD, the performance is simulated and the sensor prototype is fully tested before batch production. Serious quality control and dedicated calibration processes guarantee the specifications of these OEM pressure sensors in mass production and the higher production eligible rate.

101A-a19L OEM sensors possess a flush diaphragm facing the pressure media and short length in dimensions, able to measure pressures of viscous liquids, the diaphragm form a chamber, in which oil is filled to isolate the sensing element and transfer pressure. This isolation enables the sensor to measure the pressures of corrosive fluids as well as electro conductive liquids.

The sensors feature a wide measuring range for low pressure of 0~0.35 to 0~25 bar, with high accuracy up to 0.1%fso (fso = full scale output), In addition, the sensors can be powered with either current or voltage to ease applications.


The sensor is temperature non-compensated, because of silicon resistors are very temperature dependent, so the maximum value of temperature coefficient of SPAN is high to 2.7%fso/10°C, It's very important to understand it with various specifications and their effects to accuracy.

Model 101A-a19L OEM sensors are designed for easy installation with O-rings as sealing method, the sensor has a diameter of 19 mm, the suffix L stands for low pressure, if add the suffix (TH) at the model name, the model name will change to 101A-a19L (TH), means the sensor will be produced with Tantalum diaphragm and Hastelloy-C pressure port for corrosive media pressure application.

All OEM pressure sensors are delivered with an individual certificate to aid their further application.



Dimensions:



Applications:

- Process control systems
- Level systems
- Hydraulic systems and valves
- Biomedical instruments
- Aviation and spaceflight, petroleum and chemical

Reference specifications:

Media Temperature:	25 ± 1 °C
Ambient Temperature:	25 ± 1 °C
Vibration:	0.1 g (1m/s/s) max
Humidity:	50% ± 10%
Ambient Pressure:	86 ~ 106 kPa
Excitation Source:	1.0 ± 0.0015 mAdc

Features:

- Measuring ranges: 0~0.35 bar to 0~25 bar
- Isolated construction, suitable for various fluid medium
- Wide suitability and easy operation, solid, reliability
- Short length in dimensions
- Temperature non-compensated
- Optional accuracy
- Mass production, cost-effective
- Gauge, absolute pressure type
- Constant current or voltage excitation

Physical properties:

Diaphragm:	316L ; Tantalum (option)
Pressure port:	1Cr18Ni9Ti; Hastelloy-C (option)
O-rings:	Viton
Lead:	Gold-plated Kovar
Fill Fluid:	Silicon oil < 0.5CC
Weight:	16 g

Environmental conditions:

Position Effect:	<0.1% of Zero shift for 90° tilt in any direction
Vibration Effect:	No change at 10gs' RMS, 20 ~ 2000Hz
Shock:	100g, for 10 millisecond
Life:	100 million cycles

BCM SENSOR TECHNOLOGIES BVBA


Model 101A-a19L Non-Compensated Low Pressure OEM Sensors

Specifications:


pressure media		viscous fluid or fluid with grains, compatible to wetted parts
pressure range	bar	0~0.35, 0~0.6, 0~1, 0~2.5, 0~6, 0~10, 0~16, 0~25
pressure type		absolute pressure, gauge pressure
full scale output	mV	≥ 30 (ranges 0~0.35, 0~0.6); ≥ 50 (other ranges)
overload pressure	%fs	200
zero offset	mV	±1 mV
combined error	%fso	0.1, 0.25 (standard), 0.5
temperature coefficient of ZERO	%fso/10°C	±0.7
temperature coefficient of SPAN	%fso/10°C	±2.7
compensation temperature range	°C	0 ~ 70
media temperature range	°C	-30 ~ +100
storage temperature range	°C	-30 ~ +100
long term stability	%fso/year	≤ 0.2
excitation power supply		1 ± 50% mA or 5 ± 10% Vdc
bridge resistance	kΩ	5 ± 20%
insulation resistance	MΩ	100 @ 100 V dc
response time	ms	≤1 (10% ~ 90% of leading edge)
dynamic response time	ms	2
heat hysteresis	%fso	0.1 @ 25°C
electrical connection		6P (6 gold-plated kovar pins, Φ0.45); 5F (4 colored PVC flexible wires, 100 mm length)

The listed specifications are subject to change without prior notice.

Wheatstone-bridge circuit:



Electronic connections:

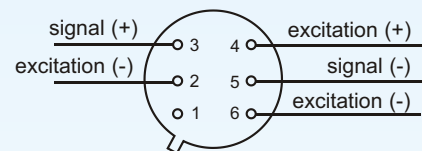

6-pin or 5-wire electrical configuration

pin	connection	color
1	N.C. (*)	N.A. (**)
2	excitation -	black
3	signal +	orange
4	excitation +	red
5	signal -	yellow
6	excitation -	brown

* N.C.: not connected

** N.A.: not available

BCM SENSOR TECHNOLOGIES BVBA

Model 101A-a19L Non-Compensated Low Pressure OEM Sensors



Ordering codes system:

example: 101A-a19L - 10 - G - II - 6P - v - Cxxxx

model number	
101A-a19L	
101A-a19L(TH)*	
pressure ranges & available pressure types	
035 = 0 ~ 35 kPa G, A	6 = 0 ~ 6 bar G, A
060 = 0 ~ 60 kPa G, A	10 = 0 ~ 10 bar G, A
1 = 0 ~ 1 bar G, A	16 = 0 ~ 16 bar G, A
2.5 = 0 ~ 2.5 bar G, A	25 = 0 ~ 25 bar G, A
pressure types	
G = gauge (relative) pressure	
A = absolute pressure	
combined accuracy (L+H+R)	
I = 0.1 %fso	II = 0.25 %fso
III = 0.5 %fso	
electrical connection	
6P = 6 gold-plated Kovar pins of 0.45 mm in diameter	
5F = 4 colored PVC flexible wires (length = 100 mm)	
excitation power supply	
c = 1 ± 50% mA	v = 5 ± 10% Vdc
<p>Cxxxx: This is a customized code given by the customer who can use this code to indicate his desired/wished specifications of the sensor to be ordered on his order sheet. The code starts with a "C" and is followed by 4 digits, the customer can use the 4 digits to indicate the month and date when he requests this customized specifications. The sales team of BCM will confirm this customized specifications when sending BCM's <<Order Confirmation>>.</p>	

Note: *: TH = Ta-diaphragm and Hastelloy C housing

Ordering Code Explanations: 101A-a19L - 10 - G - II - 6P - v - C0116

Model 101A-a19L non-compensated low pressure OEM sensor for gauge (relative) pressure measurement in 0~10 bar range, the typical accuracy of pressure sensor is 0.25%fso, electrical connection is 6 gold-platted kovar pins and the sensor is required to power supply with constant 5V voltage. The customer has indicated on January 16th his wished specifications on his order sheet for the ordered 101A-a19L, and this customer-wished specifications has to be confirmed by BCM sales team on <<Order Confirmation>>.



BCM SENSOR TECHNOLOGIES BVBA

ISO9001 Certified Company