



Model 1664 Single Point Load Cells

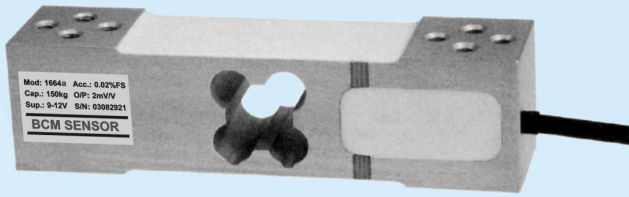


Suggested platform size: 400mm x 400mm

type: single point (off center) load cell
 material: aluminum alloy
 surface: anodized treatment
 protection: IP 65
 certificate: OIML C3 (option)
 application: retail, bench and counting scales

Dimensions:

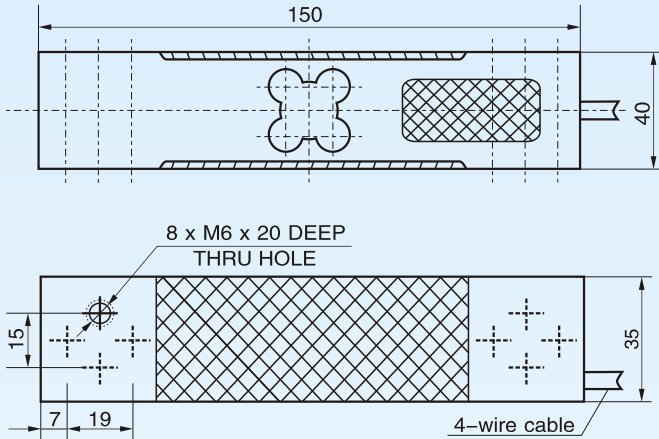

Electrical connection:

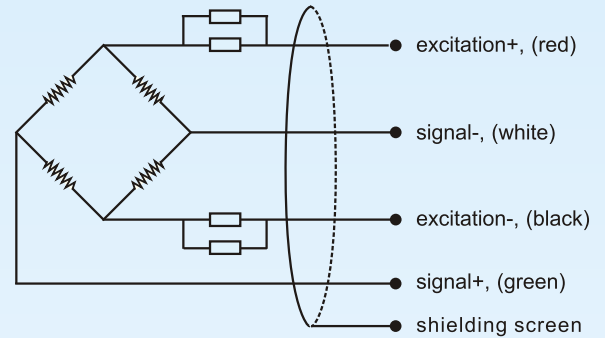

Specifications:

capacity	kg	50, 100, 200, 300
rated output	mV/V	2.0 ± 0.1
accuracy	%FSO	0.02 (option: OIML C3)
zero unbalance	%FSO	± 1.0
non-linearity	%FSO	± 0.02
hysteresis	%FSO	± 0.02
repeatability	%FSO	± 0.01
creep	%FSO/30min	± 0.02
temperature coefficient of SPAN	%FSO/10°C	0.02
temperature coefficient of ZERO	%FSO/10°C	0.02
input resistance	Ω	410 ± 10
output resistance	Ω	350 ± 10
insulation resistance	MΩ	≥ 5000@50 VDC
excitation voltage	V	9~12 DC/AC
maximum excitation	V	18 DC/AC
compensated temperature range	°C	-10 ~ +40
operating temperature range	°C	-20 ~ +65
safe overload	%FS	120
ultimate overload	%FS	150
cable length	m, shielded PVC cable	2 (Φ5 mm 4-wire)

The listed specifications are subject to change without prior notice.

How to order: model - capacity - output - accuracy - IP rating - cable length- customer specific requests
 ordering code example: 1664 - 200kg - 2mV/V - OIML C3- IP 65 - 2m - no specific requests

BCM SENSOR TECHNOLOGIES BVBA